


## Explosion-proof plastic housing for T8 LED lamps.



**CE  $\text{Ex}$  II 3G Ex nR IIC T6 Gc**  
**CE  $\text{Ex}$  II 3D Ex tc IIC T85°C Dc**

- Zone 2 and Zone 22 certificate
- For T8 LED lamps
- IP 66
- high quality materials
- different available mounting accessoires
- ideal for replacing traditional fluorescent luminaires

Dimension	A/mm	B/mm
ECO 60	703	732
ECO 120	1312	1340
ECO 150	1615	1642

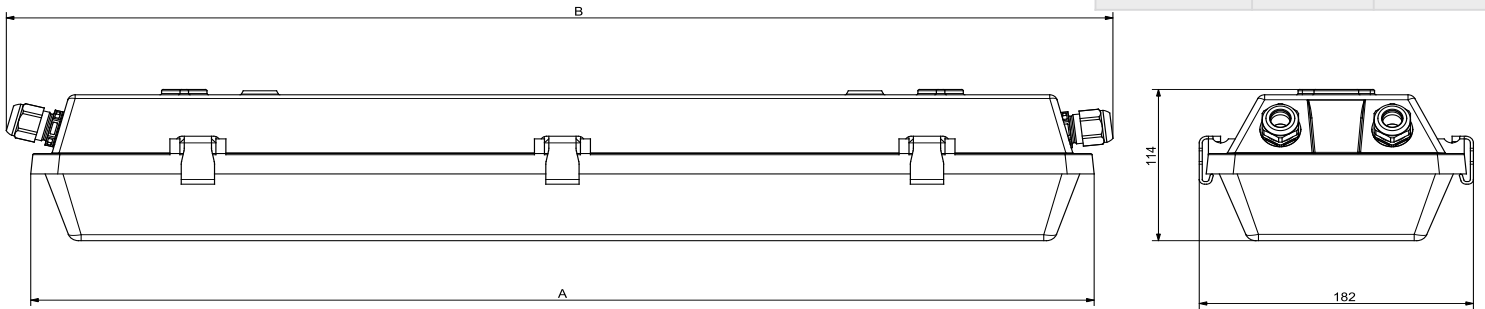

Type of luminaire	Ex Zone	Ex protection mode	No. of T8 LED lamps	Maximum power	Ex thermal class	Weight
ExProof Linear ECO 60 Z2	Z2/22	nR / tc	1 or 2	1x10 W or 2x10 W	T6 / T85°C	2,1 kg
ExProof Linear ECO 120 Z2	Z2/22	nR / tc	1 or 2	1x20 W or 2x20 W	T6 / T85°C	3,4 kg
ExProof Linear ECO 150 Z2	Z2/22	nR / tc	1 or 2	1x30 W or 2x30 W	T6 / T85°C	4,2 kg

Nominal supply voltage:	220-240 V AC 50/60Hz
Beam angle:	120°
IP class:	IP 66
IK class:	IK 10
Electric protection:	CLASS I (protective earth)
Surface treatments:	none
Materials:	GRP, PC
Ambient temperature:	-30°C - +50°C